
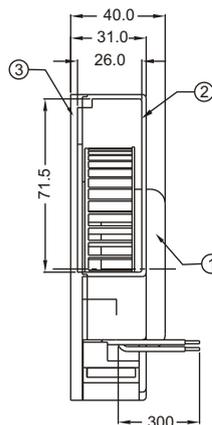




AC 1231 SERIES BLOWER

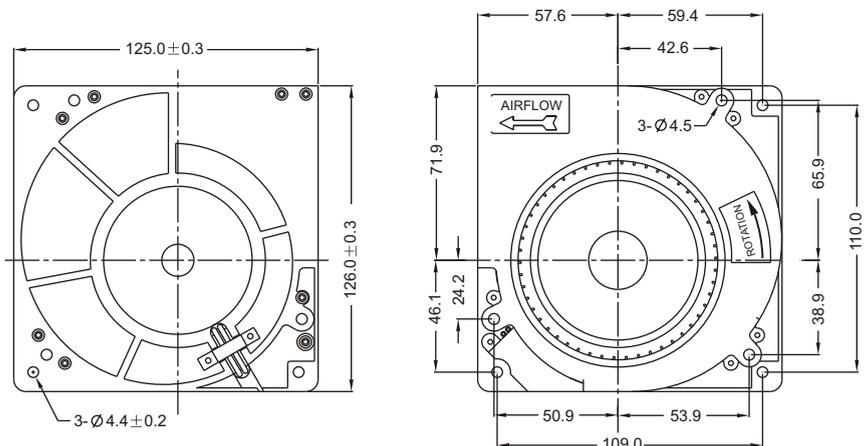

Size: 125mmx126mmx40mm
Airflow: 63~73m³/hr
 37~43CFM
Weight: (①PA6)620g; (②ALUMINIUM) 668g
Noise: 54~57dBA
Impeller: ①PA6 UL94V-0 Reinforced Plastic
Frame: ②PA6 UL94V-0 Reinforced Plastic or Aluminum Alloy
 ③Aluminum Alloy
Lead Wire: AWG#24 UL 3266
 (Optional)
Motor: Capacitor-Run Induction Motor
Safety: UL.CUL.TUV.CE
Operation Temperature: -10°C~+70°C

Unit:mm

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH1231S1-C	Sleeve	220~240	50/60	0.13/0.13	27/28	2600/3000	54/57	63/71	37/42	15.4/22	620
RCH1231S2-C		110~125	50/60	0.27/0.25	27/28	2600/3000	54/57	63/71	37/42	15.4/22	
RCH1231B1-C	Ball	220~240	50/60	0.13/0.13	26/27	2750/3050	55/57	68/73	40/43	15.8/22.6	
RCH1231B2-C		100~125	50/60	0.27/0.29	26/27	2750/3050	55/57	68/73	40/43	15.8/22.6	

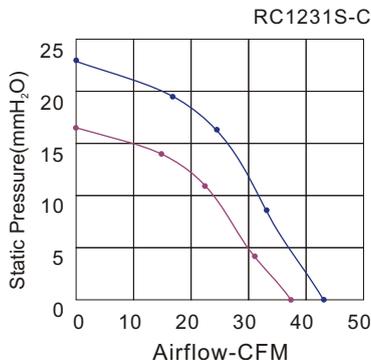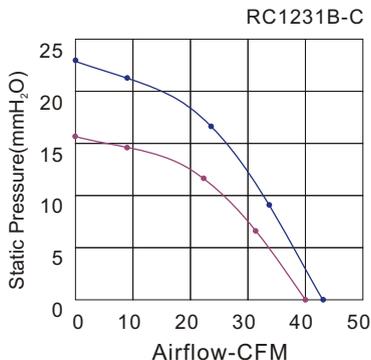

Key
 — 60Hz
 — 50Hz