


Unit:mm

Size: 207.8mmx83.5mmx211.3mm  
 Airflow: 119~136m<sup>3</sup>/hr  
 175~215CFM  
 Weight: 896g  
 Noise: 58~60dBA  
 Impeller: PP UL94V-0 Reinforced Plastic  
 Frame: PP UL94V-0 Reinforced Plastic  
 Lead Wire: SPT-2(W) OR Customize Design  
 (Optional)  
 Motor: Capacitor-Run Induction Motor  
 Safety: UL.CUL.CE.TUV  
 Operation Temperature: -30°C~+70°C

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Weight Gram
								M <sup>3</sup> /hr	CFM		
RCH2048S1-C	Sleeve	230	50	0.35	74	2450	58	119	70	27	896
RCH2048S2-C		115	60	0.77	81	2800	60	136	80	41	

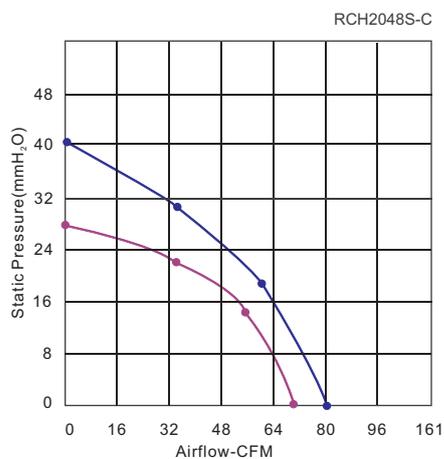

Key  
 — RCH2048S2-C  
 — RCH2048S1-C