



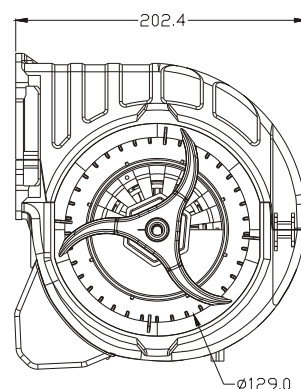

Unit:mm

Size: 273mmx220mmx202mm
 Airflow: 868~965m³/hr
 511~568CFM
 Weight: 3000g
 Noise: 61~63dBA
 Impeller: PP UL94V-0 Reinforced Plastic
 Frame: PP UL94V-0 Reinforced Plastic
 Connector: AMP350781-1
 Motor: Capacitor-Run Induction and external rotor Motor
 Safety: UL.CE.CUL
 Operation Temperature: -10°C~+70°C

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCL2720S1-C	Sleeve	230	50/60	0.80/0.90	150/180	1300/1500	61/63	868/965	511/568	16.6/23.5	1350
RCL2720S2-C		115	50/60	1.4/1.7	150/180	1300/1500	61/63	868/965	511/568	16.6/23.5	
RCL2720B1-C	Ball	230	50/60	0.80/0.90	150/180	1300/1500	61/63	868/965	511/568	16.6/23.5	
RCL2720B2-C		115	50/60	1.4/1.7	150/180	1300/1500	61/63	868/965	511/568	16.6/23.5	

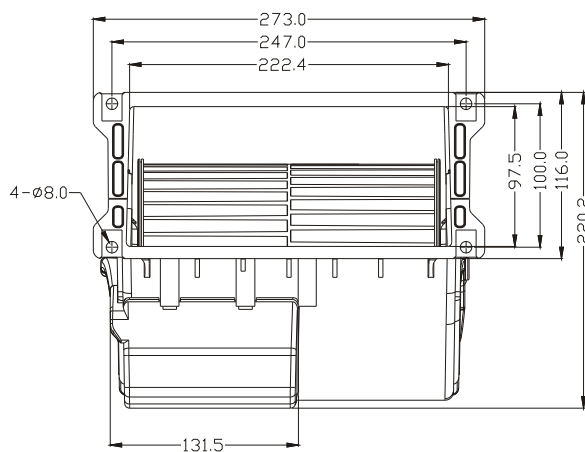