


93x93x30mm (Blower)

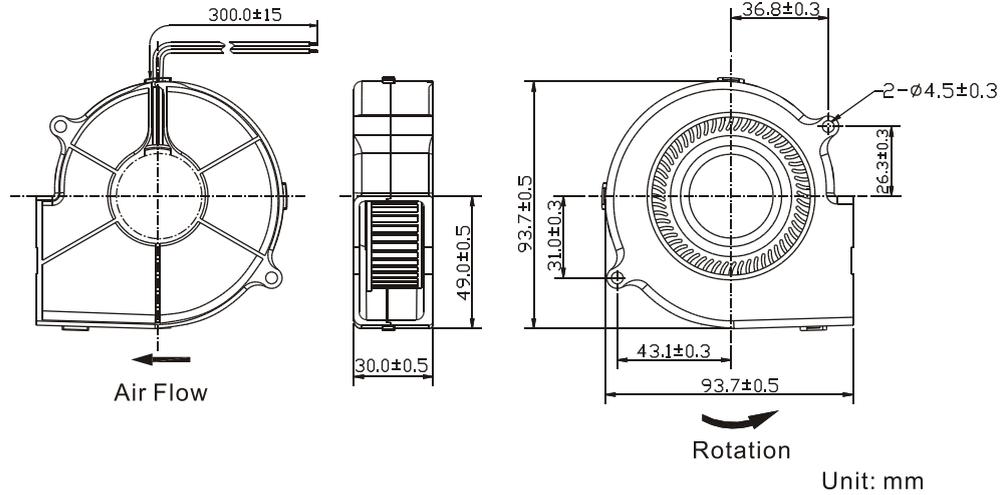


General Specification:

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、
35%~85%RH
- Storage Temperature : -40°C~80°C、
35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

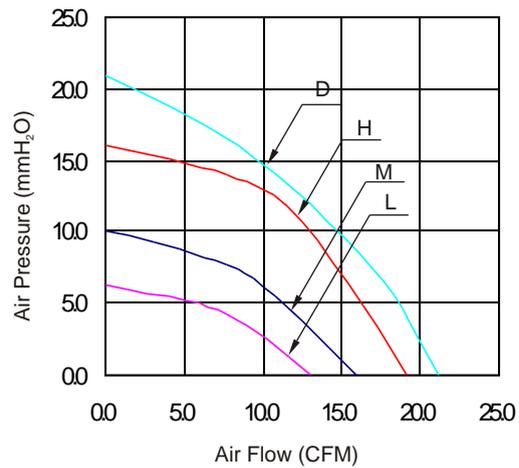

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RBH9330S	Sleeve	12	6.0~13.8	0.45	3,000	19.1	16.0	45	•	•		•	155
RBM9330S			6.0~13.8	0.30	2,500	15.8	10.0	42	•	•		•	
RBL9330S			6.0~13.8	0.20	2,100	13.0	6.3	38	•	•		•	
RBH9330B	Ball		6.0~13.8	0.45	3,000	19.1	16.0	45	•	•		•	
RBM9330B			6.0~13.8	0.30	2,500	15.8	10.0	42	•	•		•	
RBL9330B			6.0~13.8	0.20	2,100	13.0	6.3	38	•	•		•	
RBD9330S2	Sleeve	24	12.0~27.6	0.30	3,300	21.2	20.9	49	•	•			155
RBH9330S2			12.0~27.6	0.25	3,000	19.1	16.0	45	•	•			
RBM9330S2			12.0~27.6	0.15	2,500	15.8	10.0	42	•	•			
RBL9330S2			12.0~27.6	0.10	2,100	13.0	6.3	38	•	•			
RBD9330B2	Ball		12.0~27.6	0.30	3,300	21.2	20.9	49	•	•			
RBH9330B2			12.0~27.6	0.25	3,000	19.1	16.0	45	•	•			
RBM9330B2			12.0~27.6	0.15	2,500	15.8	10.0	42	•	•			
RBL9330B2			12.0~27.6	0.10	2,100	13.0	6.3	38	•	•			

Notes: ©All readings are typical values at rated voltage.
©Specifications subjected to change without prior notice.