


**PUMP SERIES**

**7038**


**Micro Diaphragm Liquid Pump**

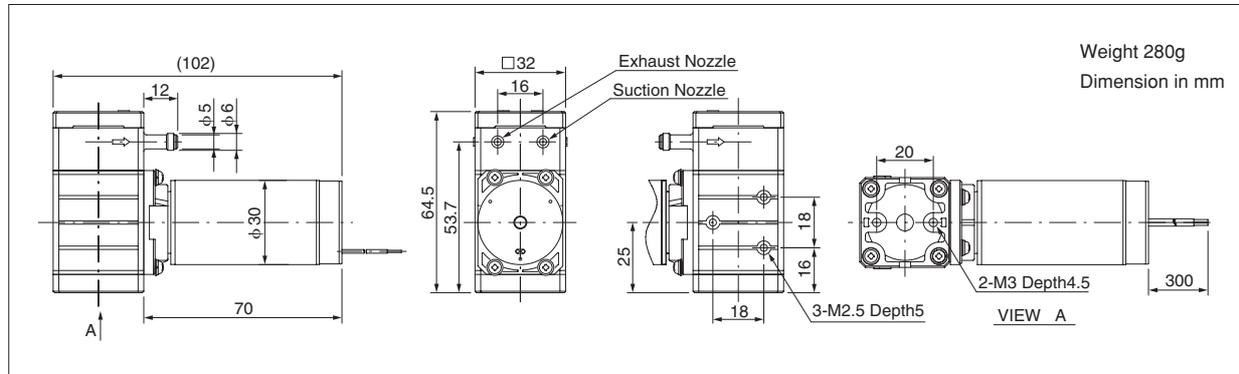

**Ordering number**

		<b>7038</b>	
Nominal voltage		24	V
Motor type		Namiki DC Brushless	
Drive circuit type		Integrated Sensorless	
Maximum flow rate		630	ml/min
Nominal current consumption		370	mA
Exhaust pressure range		0...+100	kPa
Suction pressure range		-375...0 (-50...0 kPa)	mm Hg

Performance characteristics

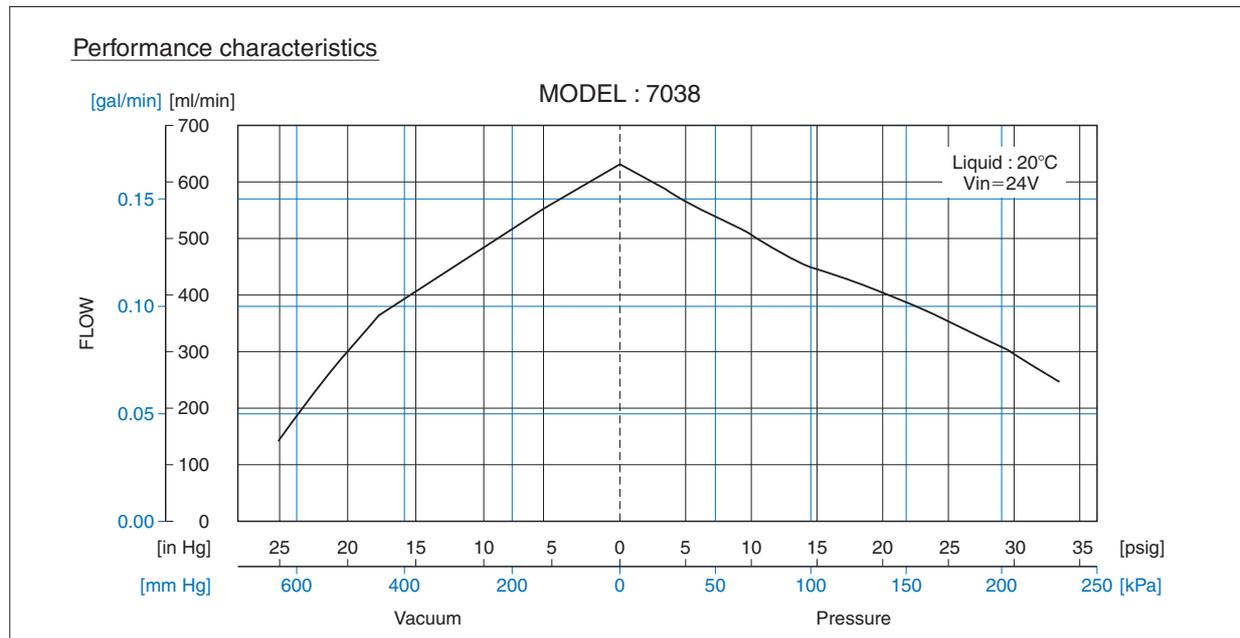

**Options:**

For special solutions or different wetted materials, please contact our sales division.

Ordering number	7048
Diaphragm	PTFE

**General Specifications**

Ambient temperature range	+5...+50	°C
Fluid temperature	+5...+50	°C
Rubber material	FKM	
Resin material	PFA, POM	

Conditions: Data displayed in this datasheet are measured with purified water at 20° C using a Toalon-G tube of 4 mm internal (6mm external) diameter and 160cm length using Namiki standard test equipment.