


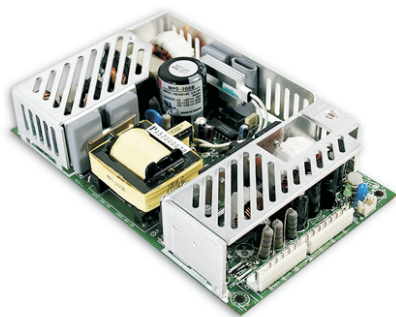

## Specification

### AC INPUT VOLTAGE

90~264 VAC, 47~440Hz / 127~370VDC.

### POWER FACTOR (Typ.)

PF>0.95/230VAC PF>0.98/115VAC at full load

### AC INPUT CURRENT (Typ.)

Maximum input current 3.5A at 115VAC, 60Hz or 1.6A at 230VAC, 60Hz with 100% output load.

### INRUSH CURRENT (Typ.)

Inrush current is less than 25A at 115VAC or less than 40A at 230VAC under cold start conditions. Limiting provided by internal thermistors.

### SETUP, RISE TIME

1000ms, 20ms / 230VAC at full load  
3000ms, 20ms / 115VAC at full load

### HOLD-UP TIME (Typ.)

16ms / 230VAC at full load  
16ms / 115VAC at full load

### LEAKAGE CURRENT

Leakage current is less than 180 $\mu$ A at 264VAC for earth leakage current  
Leakage current is less than 100 $\mu$ A at 264VAC for patient leakage current

### DC OUTPUT ADJ. RANGE

DC output voltage (or CH1 of multiple output models) can be adjusted between -5%~+10% rated output voltage by potential meter.

### OVER LOAD PROTECTION

Fully protected against short circuit and output overload. The hiccup type protection will be activated at 120~160% rated load and recovers automatically after fault condition is removed.

### OVER VOLTAGE PROTECTION

Provided on output channel 1 only at 115%~135% rated output voltage.  
Output will be shut down when this protection is activated.

### OVER TEMPERATURE PROTECTION

When the temperature of TSW1 which detect on heat sink of power transistor reaches 95 $^{\circ}$ C, This protection is activated. Then output will be shut down and recovers automatically after temperature goes down.

### POWER GOOD / FAIL SIGNAL

TTL logic high for power good and TTL low for power fail. When the output voltage reaches 90% of rated value, a +5V TTL signal will be sent out with a 10~500ms delay; At least 1ms before the output voltage goes below 90% of the rated value, the TTL signal will be turned off.

\* MPS-200-3.3 does not have this function.

### REMOTE CONTROL

RC+/RC-:0 ~ 0.8V=power on; 4 ~ 10V=power off sink current<4~10mA

## Features

- Universal AC input / Full range
- Low leakage current <180 $\mu$ A
- Protections:Short circuit/Over load/Over voltage/Over temperature
- Free air convection for 140W and forced air convection for 200W
- UL60601-1 medical safety approved
- With power good and fail signal output
- Built-in remote ON-OFF control
- Built-in remote sense function
- Fixed switching frequency at 100KHz
- 3 years warranty



### WORKING TEMP.

Whole series can operate from -20~70 $^{\circ}$ C. Please refer to the derating curves.

### WORKING HUMIDITY

20~90% RH non-condensing.

### STORAGE TEMP., HUMIDITY

-40~+85 $^{\circ}$ C, 10~90% RH

### TEMP. COEFFICIENT

$\pm 0.04\%/^{\circ}$ C on all outputs at full load between 0~50 $^{\circ}$ C of ambient temperature.

### VIBRATION

2G of acceleration, vibrating frequency adjust from 10Hz ~500Hz within a 10-minute cycle. 6 testing cycles (60 minutes) each along X, Y, Z axes.

### SAFETY STANDARDS

Medical : UL60601-1, TUV EN60601-1 approved  
Commercial : Also design refer to UL60950-1, TUV EN60950-1

### WITHSTAND VOLTAGE

4000VAC between input and output  
1500VAC between input and F.G.  
1500VAC between output and F.G.

### ISOLATION RESISTANCE

>100M Ohms for I/P-O/P, I/P-FG, O/P-FG by using 500VDC test voltage.

### EMI COMPLIANCE

EMI Specifications  
Conducted & Radiation

Compliance Level  
EN55011, Class B  
EN55022, Class B  
EN61000-3-2  
EN61000-3-3

Harmonic distortion  
Voltage flicker

### EMS COMPLIANCE

EMS Specification  
ESD air  
ESD contact  
RF field susceptibility

Compliance Level  
EN61000-4-2, Level 3, 8KV  
EN61000-4-2, Level 2, 4KV  
EN61000-4-3, Level 2, 3V/m  
Level 3, 10V/m  
EN61000-4-4, Level 2, 1KV/5KHz  
Level 3, 2KV/5KHz  
EN61000-4-5, Level 4, 2KV/Line-Line  
4KV/Line-Earth  
EN61000-4-6, Level 2, 3Vrms/m  
Level 3, 10Vrms/m  
EN61000-4-8, Level 2, 3A/m  
Level 3, 10A/m  
EN61000-4-11, Compliance  
ENV50204, Level 2, 3V/m, 900MHz  
Level 3, 10A/m, 900MHz

EFT(Electrical Fast Transient)/Burst

Lightning/Surge

Conducted RF susceptibility

Magnetic field immunity

Voltage dip, interruption  
Digital phone carrier immunity

### MTBF

262,100 hours min. at full load and 25 $^{\circ}$ C of ambient temperature, calculated per MIL-HDBK-217F.

### DIMENSION (L\*W\*H)

177.8x107.2x35.5mm or 7"x4.22"x1.4"

### PACKING

0.66Kg; 24pcs/16.8Kg/1.04CUFT


## Output Chart

| MODEL       | OUTPUT VOLTAGE | RATED CURRENT | OUTPUT CURRENT |                   |                  |                                   | RIPPLE & NOISE (Max.) (Note 2) | VOLTAGE TOLERANCE (Note 3) | LINE REGULATION | LOAD REGULATION | EFFICIENCY (typ.) |
|-------------|----------------|---------------|----------------|-------------------|------------------|-----------------------------------|--------------------------------|----------------------------|-----------------|-----------------|-------------------|
|             |                |               | MINIMUM LOAD   | CONVECTION (max.) | WITH FAN (25CFM) | PEAK LOAD WITH 25CFM FAN (Note 4) |                                |                            |                 |                 |                   |
| MPS-200-3.3 | 3.3V           | 40A           | 0A             | 28A               | 40A              | 48A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 77%               |
| MPS-200-5   | 5V             | 40A           | 0A             | 28A               | 40A              | 48A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 81%               |
| MPS-200-12  | 12V            | 16.7A         | 0A             | 11.7A             | 16.7A            | 20A                               | 100mVp-p                       | ±2.0%                      | ±0.5%           | ±1.0%           | 84%               |
| MPS-200-15  | 15V            | 13.4A         | 0A             | 9.4A              | 13.4A            | 16A                               | 100mVp-p                       | ±2.0%                      | ±0.5%           | ±1.0%           | 85%               |
| MPS-200-24  | 24V            | 8.4A          | 0A             | 5.9A              | 8.4A             | 10A                               | 150mVp-p                       | ±1.0%                      | ±0.5%           | ±1.0%           | 86%               |
| MPS-200-48  | 48V            | 4.2A          | 0A             | 3A                | 4.2A             | 5A                                | 200mVp-p                       | ±1.0%                      | ±0.5%           | ±1.0%           | 87%               |
| MPD-200A    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 82%               |
|             | 12V            | 8A            | 0.8A           | 5.4A              | 8A               | 9.6A                              | 120mVp-p                       | +8,-5%                     | ±1.0%           | ±4.0%           |                   |
| MPD-200B    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 83%               |
|             | 24V            | 4A            | 0.4A           | 2.7A              | 4A               | 4.8A                              | 180mVp-p                       | ±6.5%                      | ±1.0%           | +4,-6%          |                   |
| MPT-200A    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 80%               |
|             | 12V            | 7.5A          | 0.8A           | 5A                | 7.5A             | 9A                                | 120mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | -5V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPT-200B    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 80%               |
|             | 12V            | 6A            | 0.6A           | 4.4A              | 6A               | 7.2A                              | 120mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | -12V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPT-200C    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 80%               |
|             | 15V            | 4.7A          | 0.5A           | 3.3A              | 4.7A             | 5.6A                              | 150mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | -15V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPT-200D    | 5V             | 20A           | 4A             | 15A               | 20A              | 24A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 81%               |
|             | 24V            | 3A            | 0.3A           | 2.2A              | 3A               | 3.6A                              | 180mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | 12V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPQ-200B    | 5V             | 15A           | 3A             | 12A               | 15A              | 18A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 78%               |
|             | 12V            | 7A            | 0.7A           | 5.3A              | 7A               | 8.4A                              | 120mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | -5V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
|             | -12V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPQ-200C    | 5V             | 15A           | 3A             | 12A               | 15A              | 18A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 78%               |
|             | 15V            | 5A            | 0.5A           | 4A                | 5A               | 6A                                | 150mVp-p                       | ±6.0%                      | ±1.0%           | ±5.0%           |                   |
|             | -5V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
|             | -15V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPQ-200D    | 5V             | 15A           | 3A             | 12A               | 15A              | 18A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 79%               |
|             | 24V            | 3A            | 0.3A           | 2.3A              | 3A               | 3.6A                              | 180mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | 12V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
|             | -12V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
| MPQ-200F    | 5V             | 15A           | 3A             | 12A               | 15A              | 18A                               | 80mVp-p                        | ±2.0%                      | ±0.5%           | ±1.0%           | 81%               |
|             | 24V            | 2.7A          | 0.3A           | 2.1A              | 2.7A             | 3.3A                              | 180mVp-p                       | ±8.0%                      | ±1.0%           | ±5.0%           |                   |
|             | 15V            | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |
|             | -15V           | 2A            | 0A             | 1A                | 2A               | 2.4A                              | 80mVp-p                        | ±5.0%                      | ±0.5%           | ±1.0%           |                   |

- Notes :
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
  2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor.
  3. Tolerance : includes set up tolerance, line regulation and load regulation.
  4. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power.
  5. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
  6. Derating may be needed under low input voltages. Please check the derating curve for more details.

## Mechanical Specification(MPS-200)

Unit:mm

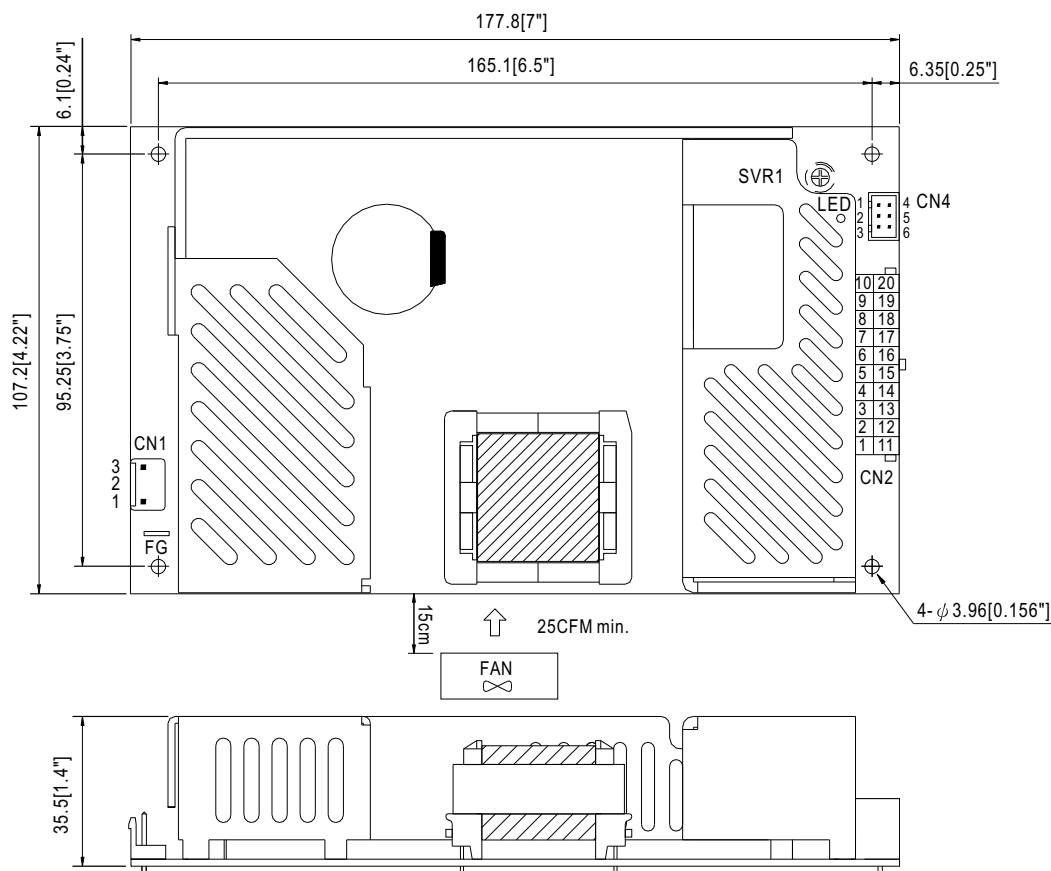

AC Input Connector (CN1) : JST B3P-VH or equivalent

| Pin No. | Assignment | Mating Housing        | Terminal                       |
|---------|------------|-----------------------|--------------------------------|
| 1       | AC/N       | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2       | No Pin     |                       |                                |
| 3       | AC/L       |                       |                                |


DC Output Connector (CN2) : MOLEX 5566-20 or equivalent

| Pin No.     | Assignment   | Mating Housing           | Terminal                 |
|-------------|--------------|--------------------------|--------------------------|
| 1~5, 11~15  | DC OUTPUT -V | MOLEX 5557 or equivalent | MOLEX 5556 or equivalent |
| 6~10, 16~20 | DC OUTPUT +V |                          |                          |


DC Output Connector (CN4) : TKP DH2I-2\*3 or equivalent

| Pin No. | Assignment | Mating Housing            | Terminal              |
|---------|------------|---------------------------|-----------------------|
| 1       | PG         | TKP DH2-2*3 or equivalent | TKP DHT or equivalent |
| 2       | RS-        |                           |                       |
| 3       | GND        |                           |                       |
| 4       | RC+        |                           |                       |
| 5       | RS+        |                           |                       |
| 6       | RC-        |                           |                       |


## Derating Curve (MPS-200)

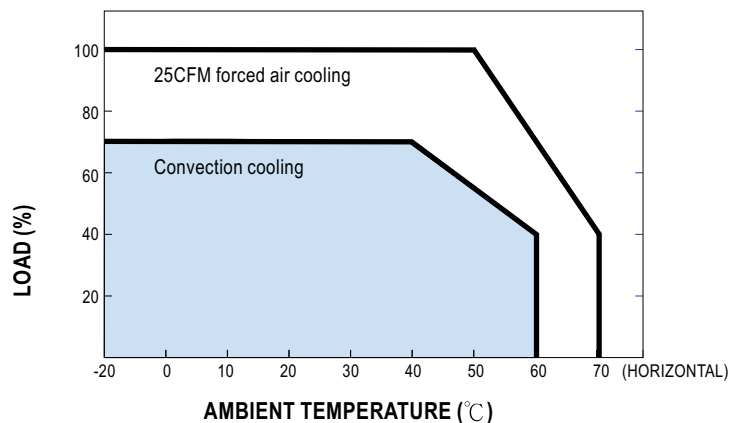

## Static Characteristics (MPS-200)

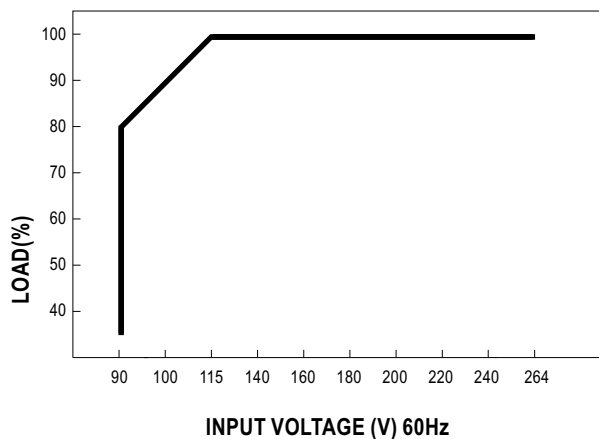

### Mechanical Specification(MPD/T/Q-200)

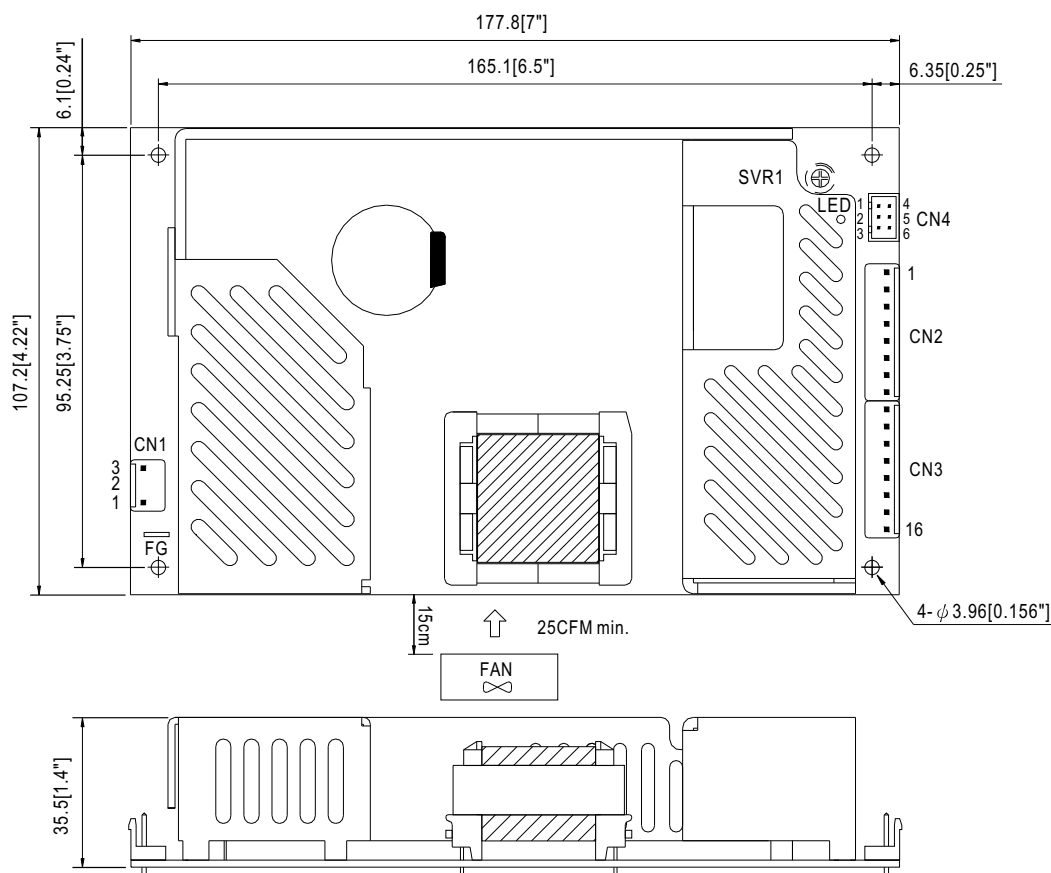

AC Input Connector (CN1) : JST B3P-VH or equivalent

| Pin No. | Assignment | Mating Housing        | Terminal                       |
|---------|------------|-----------------------|--------------------------------|
| 1       | AC/N       | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2       | No Pin     |                       |                                |
| 3       | AC/L       |                       |                                |


DC Output Connector (CN2,3) : JST B8P-VH\*2 or equivalent

| Pin No. | Assignment | Mating Housing        | Terminal                       |
|---------|------------|-----------------------|--------------------------------|
| 1,2,3,4 | V1         | JST VHR or equivalent | JST SVH-21T-P1.1 or equivalent |
| 5~11    | COM        |                       |                                |
| 12,13   | V2         |                       |                                |
| 14      | V3         |                       |                                |
| 15      | No pin     |                       |                                |
| 16      | V4         |                       |                                |

DC Output Connector (CN4) : TKP DH2I-2\*3 or equivalent

| Pin No. | Assignment | Mating Housing            | Terminal              |
|---------|------------|---------------------------|-----------------------|
| 1       | PG         | TKP DH2-2*3 or equivalent | TKP DHT or equivalent |
| 2       | RS-        |                           |                       |
| 3       | GND        |                           |                       |
| 4       | RC+        |                           |                       |
| 5       | RS+        |                           |                       |
| 6       | RC-        |                           |                       |

### Derating Curve (MPD/T/Q-200)

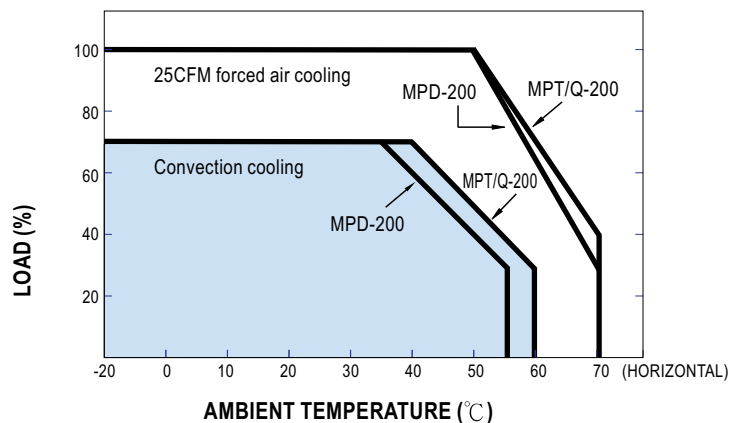

### Static Characteristics (MPD,T,Q-200)

