



■ Features :

- Universal AC input/Full range
- Protections:Short circuit/Over load/Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty




SPECIFICATION

| MODEL                 | NES-25-5  | NES-25-12   | NES-25-15    | NES-25-24      | NES-25-48    |              |
|-----------------------|---|---|--------------|----------------|--------------|--------------|
| OUTPUT                | DC VOLTAGE  | 5V  | 12V          | 15V            | 24V          | 48V          |
|                       | RATED CURRENT   | 5A  | 2.1A         | 1.7A           | 1.1A         | 0.57A        |
|                       | CURRENT RANGE   | 0 ~ 5A  | 0 ~ 2.1A     | 0 ~ 1.7A       | 0 ~ 1.1A     | 0 ~ 0.57A    |
|                       | RATED POWER   | 25W   | 25.2W        | 25.5W          | 26.4W        | 27.36W       |
|                       | RIPPLE & NOISE (max.) Note.2  | 80mVp-p   | 120mVp-p     | 150mVp-p       | 200mVp-p     | 240mVp-p     |
|                       | VOLTAGE ADJ. RANGE  | 4.75 ~ 5.5V   | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 21.6 ~ 26.4V | 43.2 ~ 52.8V |
|                       | VOLTAGE TOLERANCE Note.3  | ±2.0%   | ±1.0%        | ±1.0%          | ±1.0%        | ±1.0%        |
|                       | LINE REGULATION Note.4  | ±0.5%   | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                       | LOAD REGULATION Note.5  | ±0.5%   | ±0.5%        | ±0.5%          | ±0.5%        | ±0.5%        |
|                       | SETUP, RISE TIME  | 500ms, 30ms/230VAC      1200ms, 30ms/115VAC at full load  |              |                |              |              |
| HOLD TIME (Typ.)      | 50ms/230VAC      10ms/115VAC at full load   |   |              |                |              |              |
| INPUT                 | VOLTAGE RANGE   | 85 ~ 264VAC      120 ~ 370VDC   |              |                |              |              |
|                       | FREQUENCY RANGE   | 47 ~ 63Hz   |              |                |              |              |
|                       | EFFICIENCY (Typ.)   | 80%   | 83%          | 84%            | 86%          | 86%          |
|                       | AC CURRENT (Typ.)   | 0.55A/115VAC      0.35A/230VAC  |              |                |              |              |
|                       | INRUSH CURRENT (Typ.)   | COLD START 45A  |              |                |              |              |
| LEAKAGE CURRENT       | <2mA / 240VAC   |   |              |                |              |              |
| PROTECTION            | OVER LOAD   | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |              |                |              |              |
|                       | OVER VOLTAGE  | 5.75 ~ 6.75V  | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V | 55.2 ~ 64.8V |
|                       |   | Protection type : Shut down o/p voltage, re-power on to recover   |              |                |              |              |
| ENVIRONMENT           | WORKING TEMP.   | -20 ~ +60°C (Refer to output load derating curve)   |              |                |              |              |
|                       | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing  |              |                |              |              |
|                       | STORAGE TEMP., HUMIDITY   | -40 ~ +85°C, 10 ~ 95% RH  |              |                |              |              |
|                       | TEMP. COEFFICIENT   | ±0.03%/°C (0 ~ 45°C)  |              |                |              |              |
| VIBRATION             | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |   |              |                |              |              |
| SAFETY & EMC (Note 6) | SAFETY STANDARDS  | UL60950-1, CB(IEC60950-1) Approved  |              |                |              |              |
|                       | WITHSTAND VOLTAGE   | I/P-O/P:3KVAC    I/P-FG:1.5KVAC    O/P-FG:0.5KVAC   |              |                |              |              |
|                       | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC  |              |                |              |              |
|                       | EMI CONDUCTION & RADIATION  | Compliance to EN55022 (CISPR22) Class B   |              |                |              |              |
|                       | HARMONIC CURRENT  | Compliance to EN61000-3-2,-3  |              |                |              |              |
| EMS IMMUNITY          | Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-1 Light industry level, criteria A   |   |              |                |              |              |
| OTHERS                | MTBF  | 411.47Khrs min.    MIL-HDBK-217F (25°C)   |              |                |              |              |
|                       | DIMENSION   | 99*82*35mm (L*W*H)  |              |                |              |              |
|                       | PACKING   | 0.3Kg; 45pcs/14Kg/0.83CUFT  |              |                |              |              |
| NOTE                  | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. Line regulation is measured from low line to high line at rated load.</li> <li>5. Load regulation is measured from 0% to 100% rated load.</li> <li>6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> </ol> |   |              |                |              |              |

**Mechanical Specification**

Case No. 932B Unit:mm

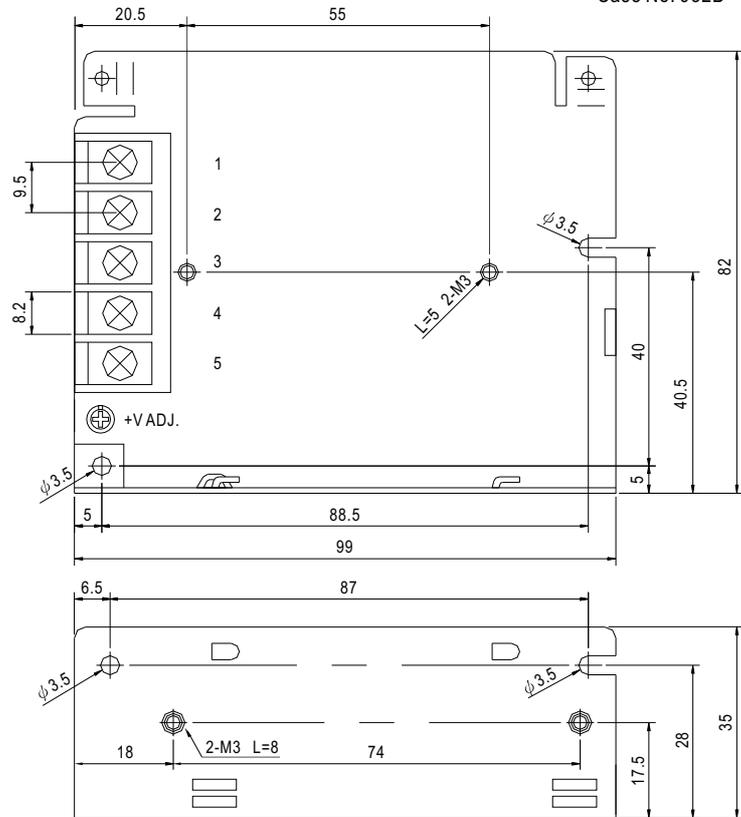


Terminal Pin. No Assignment

| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4       | DC OUTPUT -V |
| 2       | AC/N       | 5       | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

**Block Diagram**

fosc : 60KHz

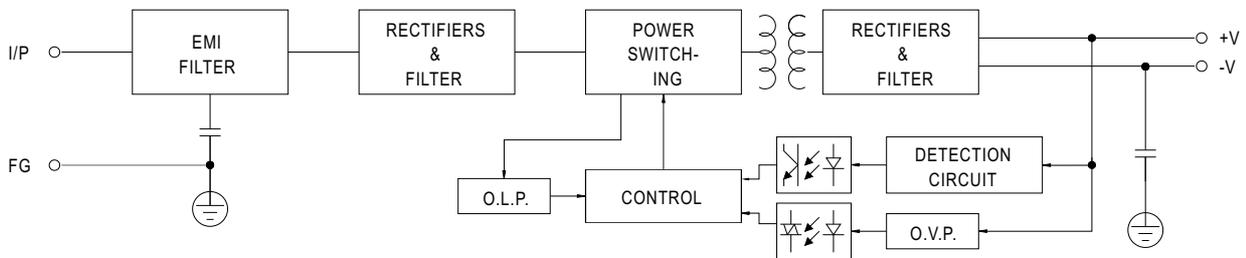

**Output Derating**

**Output Derating VS Input Voltage**

