



TRICORE CORPORATION


545 , SEC 3 , CHANG YUAN ROAD, HWA TANG COUNTRY,
 CHANG-HWA TAIWAN R.O.C
 Tel:886-4-712-5688 Fax:886-4-712-5698
 Email Address: tricore@tricore.com.tw

SOLENOID

MODEL

IS2017

OPEN FRAME SOLENOID




APPLICATION


☆ PORTABLE CD-RW

SPECIFICATION

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	Continuous (100%)	Or less (50%)	Or less (25%)	Or less (10%)
作動週期 (%) = $\frac{\text{ON 時間}}{\text{ON 時間} + \text{OFF 時間}} \times 100\%$	作動週期 (100%)	間斷 (50%)	間斷 (25%)	間斷 (10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)	∞	50	18	2
Watts at 20°C 瓦特數 (W) (在 20°C)	1	3	6	12

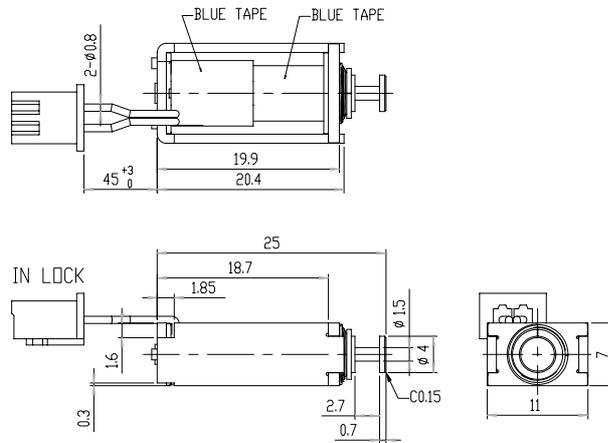

at 20°C 初期值(平均)

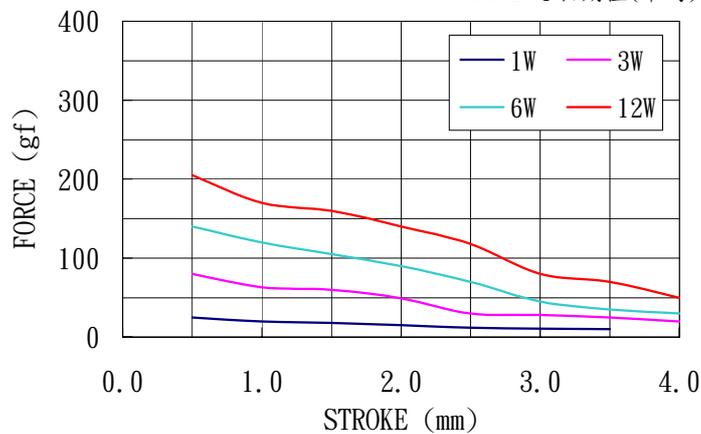

General specifications :

- Temp. Rise : <65°C at 0.9w (continuous)
- R (insulation) : >50MΩ@250V DC
- Dielectric Strength : 250V AC · 1min
- Insulation Grade : E (except lead)

Spec could be customized