




# TRICORE CORPORATION

545 , SEC 3 , CHANG YUAN ROAD, HWA TANG COUNTRY,  
CHANG-HWA TAIWAN  
Tel:886-4-712-5688 Fax:886-4-712-5698  
Email Address: tricore@tricore.com.tw

## SOLENOID


### MODEL

# MG1402



### APPLICATION

☆ Digital Camera

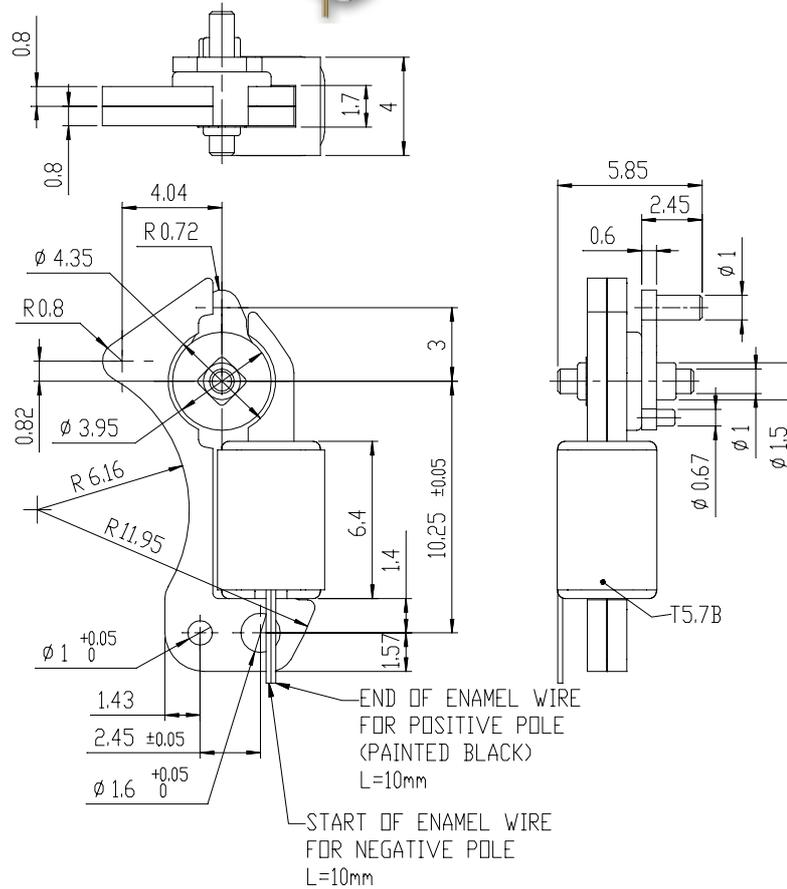

## ELECTRICAL CHARACTERISTIC

- 1.DC Resistance : 5.0  $\pm$  10% OHM
- 2.Insulation Resistance : 100 Mohm (At Input DC 100V , Between Coil And Yoke , Coil And Metal Cover)
- 3.Dielectric Withstand Voltage : At Input DC 50V For 2 Sec Between Coil And Yoke , Coil And Metal Cover No Breakdown
- 4.Operating Force : 10 gf MIN. (Input DC 1.8V For 100ms Pulse Width)
- 5.Holding Force : 5 gf MAX.

Spec could be customized