
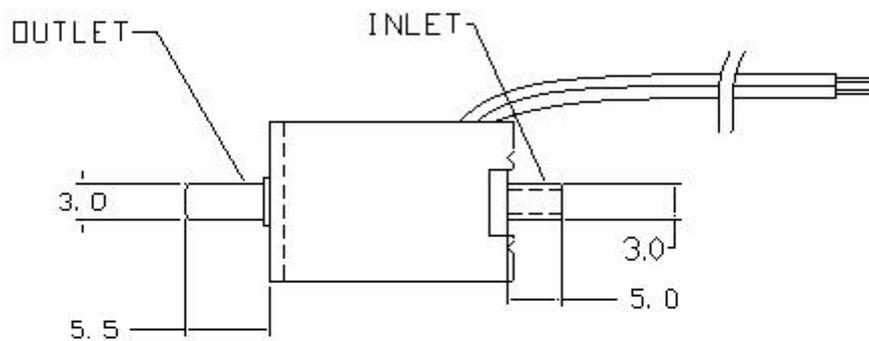


KSV2WA Specifications

1. Rated Voltage	DC12V
2. Rated Current	400mA
3. Exhaust time	Max. 6.0 seconds from 300mmHg reduce to 15 mmHg at 500CC tank.
4. Resistance	30Ω±10%
5. Leakage	Max. 3mmHg/min from 300mmHg at 500CC tank.
6. Insulation Level	A
7. Apply For	Air

PHYSICAL DIMENSION

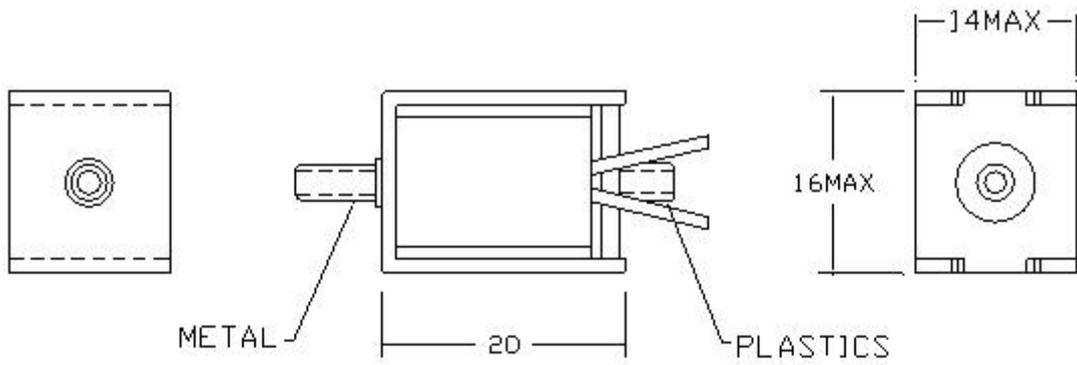

UNIT: mm