

SRA20 SERIES



Application



Automotive Instruments

| MODEL | VOLTAGE | | CURRE | STEP ANGLE | PHASE | DRIVE MODE | MASS |
|-------------------|-----------------|----|----------|------------|-------|------------|--------|
| 21SRA 2008001# | OPERATING RANGE | | CONSTANT | 10° | 2 | BI-POLAR | 10.52g |
| | 4~6V | 5V | 30Ω±8% | | | | |


Specificati

21SRA2008001#

Gear customize

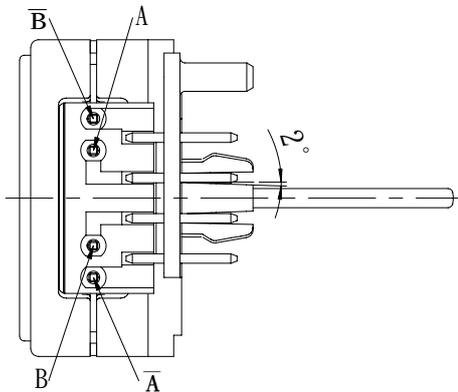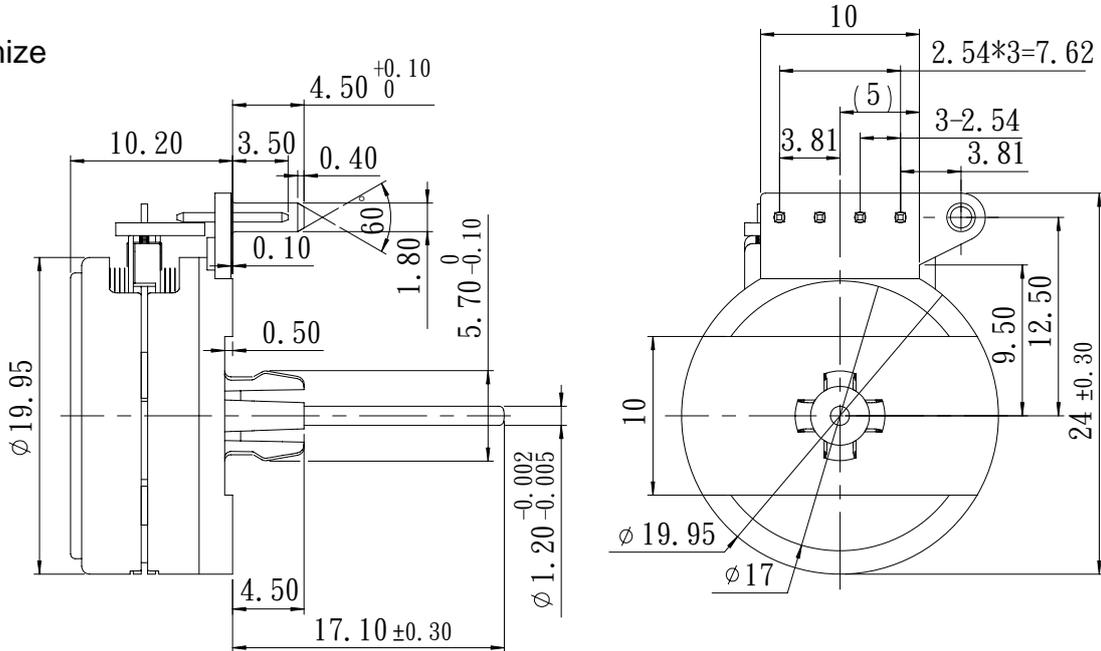

CONNECTION DIAGRAM

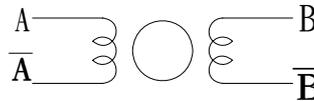

SEQUENCE OF EXCITATION

| STEP PHASE | 1 | 2 | 3 | 4 |
|------------|---|---|---|---|
| A | H | H | L | L |
| A̅ | L | L | H | H |
| B | L | H | H | L |
| B̅ | H | L | L | H |

OUTPUT SHAFT ROTATION CW