



MICRO MOTOR FM10 SERIES

Output : APPROX 0.2~1.5W
Weight : 4g (approx)

Application


Household Appliances
Precision Instruments
CD Player
Camera



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	g-cm	mN-m	W	g-cm	mN-m	A
FM1001	2.2~3.5	2.4	15995	0.05	12460	0.19	2.11	0.21	0.27	9.57	0.94	0.68
FM1006	1.0~2.4	1.5	13152	0.06	10061	0.21	1.65	0.16	0.17	7.02	0.69	0.68
FM1009	2.2~3.5	2.4	26600	0.15	21200	0.50	2.85	0.28	0.62	10.00	0.98	2.20
FM1011	1.0~2.4	1.5	18300	0.13	14100	0.36	1.90	0.18	0.28	5.20	0.51	1.25


Specification FM1001

DIRECTION OF ROTATION

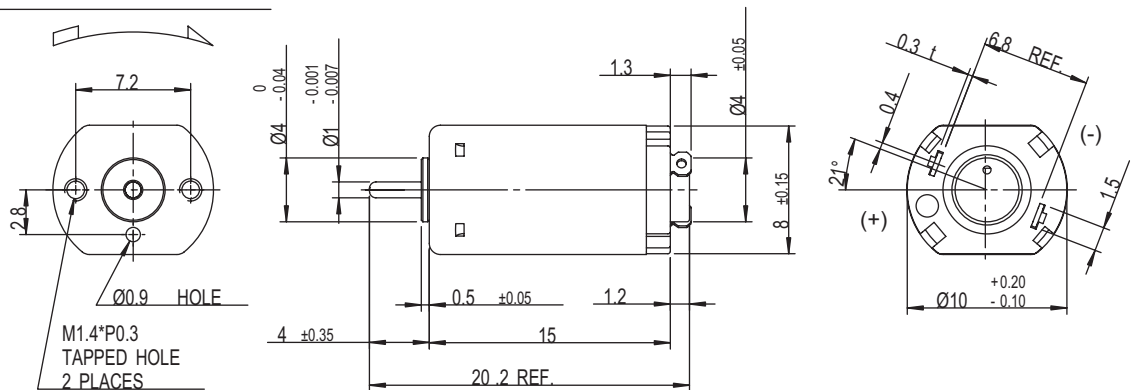

UNIT:MILLIMETERS

MODEL : FM1001
EFFECT SPEED CURRENT POWER

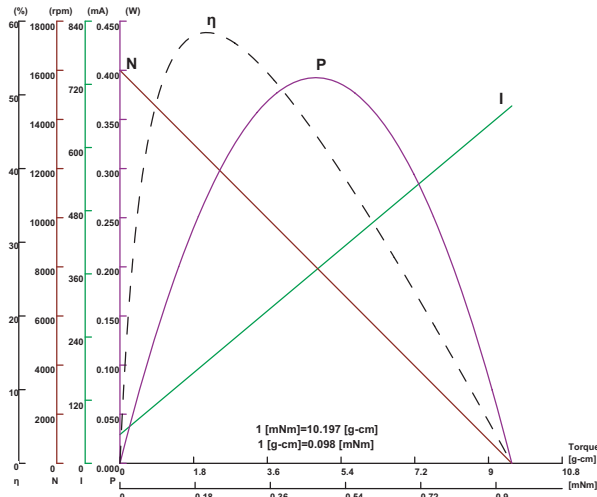

MODEL : FM1006
EFFECT SPEED CURRENT POWER

